


Figure 5 Random Route 2

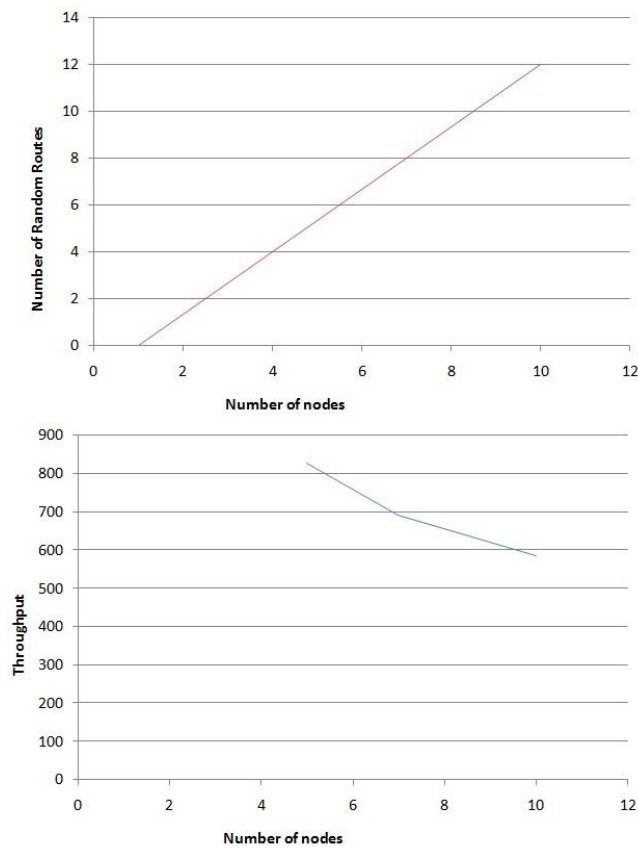

By considering 10 nodes in the simulation with all the nodes being mobile and the simulation time considered for 40seconds the throughput observed is about 585.23 Kbps.

### 6 CONCLUSION

Our proposed method has shown the effectiveness of randomized dispersive routing in combating CN attacks. Our proposed method was compared against existing multi path network .The obtained results showed tremendous improvement of security performance.

### ACKNOWLEDGMENT

The research was conducted as a part of our final year project and a project that was conducted for Old Dominion University under the guidance of Dr Ramesh Babu H S. Any opinions, findings, conclusions, or recommendations expressed in this paper are those of the author(s) and do not necessarily reflect our views.

### REFERENCES

- [1] Tao Shu, Sisi Lui, and Marwan Krunz. Secure data Collection in Wireless Sensor Networks using Randomized Dispersive Routes. *IEEE Transactions on Mobile Computing*, pages 941 – 954, July 2012.
- [2] Zehua Wang, Yuanzhu Peter Chen, Cheng Li, implementation of the AODV Routing Protocol in ns2 for Multi-hop Wireless Networks.
- [3] Rachid Haboub and Mohammed Ouzzif, Secure Routing in WSN, *International Journal of Distributed and Parallel Systems*, Vol.2 No.6 November 2011.
- [4] P. C. Lee, V. Misra, and D. Rubenstein. Distributed algorithms for secure multipath routing in attack-resistant networks. *IEEE/ACM Transactions on Networking*, 15(6):1490–1501, Dec. 2007.
- [5] P. Papadimitratos and Z. J. Haas. Secure routing for mobile ad hoc networks. In *Proceedings of SCS Communication Networks and Distributed Systems Modeling and Simulation Conference (CNDS)*, 2002.
- [6] K.Vanaja, Dr. R. Umarani ,An Analysis of Single Path AODV Vs Multipath AOMDV on Link Break Using ns-2, *International Journal of Electronics and Computer Science Engineering*
- [7] Tamer Nadeem, Ashok Agrawala, Performance of IEEE 802.11 based Wireless Sensor Networks in Noisy Environments